
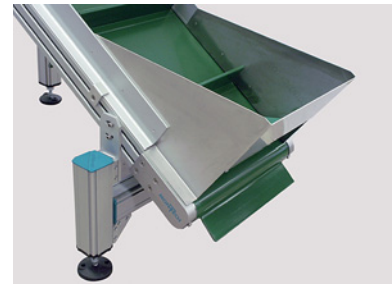
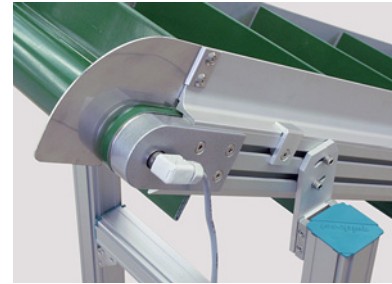
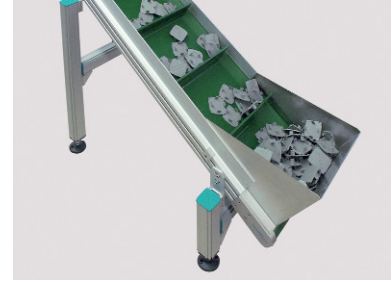


INCLINED CLEATED BELT CONVEYOR

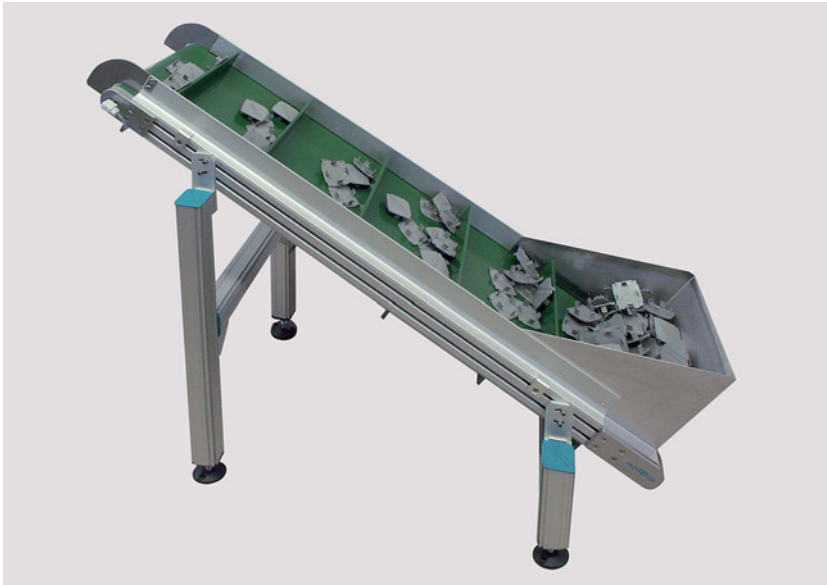

TECHNICAL DATA

Type of conveyor	GTB-600 Max Conveyor
Drive	Drum drive
Width over chassis	600 mm
Usable conveyor width	537 mm
Cleat width	520 mm
Cleat height	40 mm
Conveyor length	1500 mm
Speed	5.4 – 20.2 m/min
Belt type endless	Cleated
Substructure	Quick-Set profile framing system

SPECIAL FEATURES

- cleated inclined belt – ideal for small parts
- angled hopper for bulk material
- also available with end drive

PROJECT DESCRIPTION

The GTB-600 inclined cleated belt conveyor is ideal for carrying small parts to a higher elevation along the production line. With the additional angled hopper, it can be placed directly under the outlet of a production machine or filled with bulk material from small load carriers. The optional drum drive also makes this solution very compact and versatile.

INDUSTRIES

Automotive Suppliers
Electronics

MONTECH[®]
more than technology

MONTECH AG
Gewerbstrasse 12
CH-4552 Derendingen
Fon +41 32 681 55 00
info@montech.com
www.montech.com