


INCLINE CONVEYOR WITH PERPENDICULAR DISCHARGE

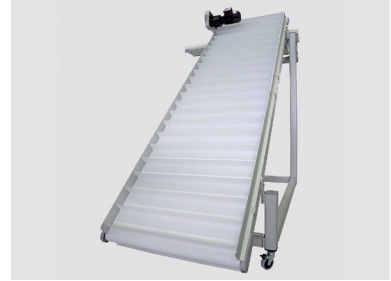

TECHNICAL DATA

Type	GTB-800 Max Conveyor
Drive	End drive, at the top
Conveyor belt width	800 mm
Useable width	737 mm
Transport length	2710 mm
Max. transport weight	100 kg
Speed	8.7 m/min
Inclination	1800 mm
Belt type endless	F-8EXWT with cleats 118.5 mm gap
Cleat width	730 mm centered
Belt type discharge conveyor	Conveyor TB30-250
Drive discharge conveyor	Three-phase motor center drive
Substructure	Quick-Set framing system, mobile

SPECIAL FEATURES


- Z-shaped riser conveyor with carrying strap
- Mobile with castors

PROJECT DESCRIPTION

Candy is ejected from production equipment onto a incline conveyor (GTB) featuring a silicone belt with cleats. The GTB elevates the products and discharges onto a perpendicular TB30 conveyor, the sweets are checked with a camera and conveyed either to the left or right for further processing.

INDUSTRY

Packaging, food

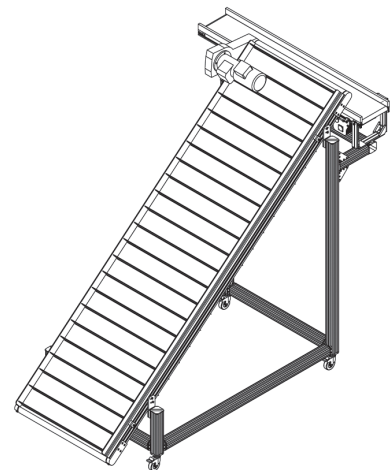

MONTECH[®]
more than technology

MONTECH AG
Gwerbestr. 12
CH-4552 Derendingen
Fon +41 32 681 55 00
info@montech.com
www.montech.com