
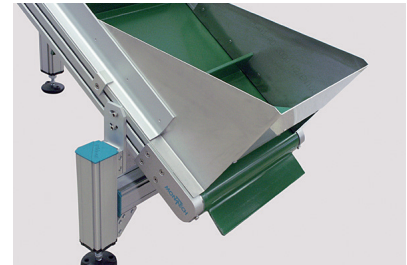
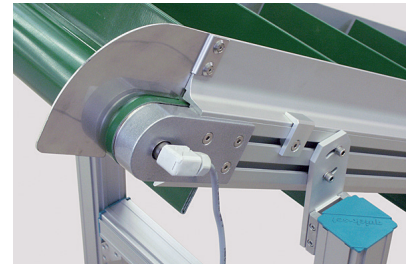
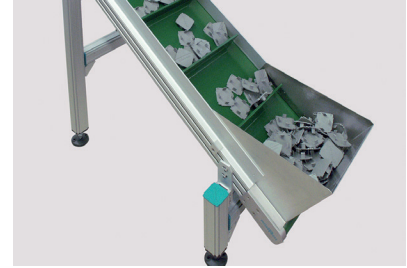


INCLINED CLEATED BELT CONVEYOR

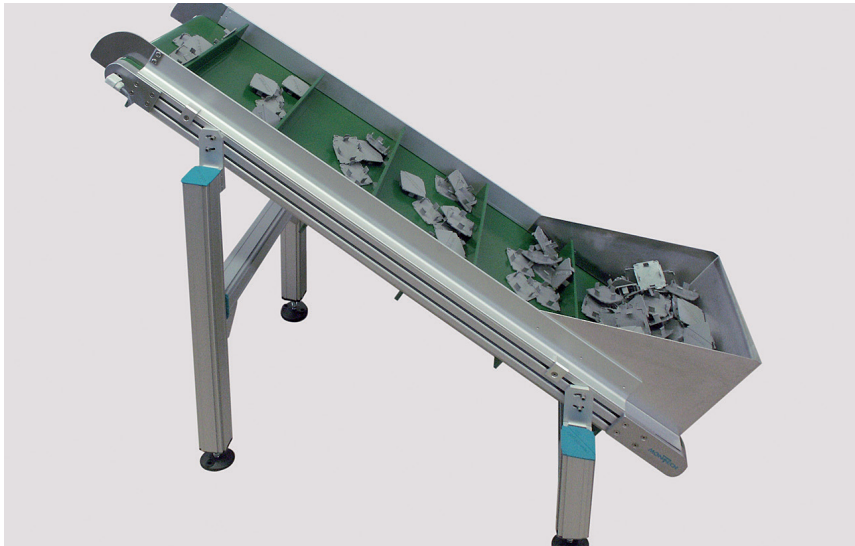

TECHNICAL DATA

Type of conveyor	GTB-600 Max Conveyor
Drive	Drum drive
Width over chassis	23.62 in (600 mm)
Usable conveyor width	21.14 in (537 mm)
Cleat width	20.47 in (520 mm)
Cleat height	1.57 in (40 mm)
Conveyor length	4.92 ft (1500 mm)
Speed	17.71 - 66.27 ft/min (5.4 - 20.2 m/min)
Belt type endless	Cleated
Substructure	Quick-Set profile framing system

SPECIAL FEATURES

- cleated inclined belt - ideal for small parts
- angled hopper for bulk material
- also available with end drive

PROJECT DESCRIPTION

The GTB-600 inclined cleated belt conveyor is ideal for carrying small parts to a higher elevation along the production line. With the additional angled hopper, it can be placed directly under the outlet of a production machine or filled with bulk material from small load carriers. The optional drum drive also makes this solution very compact and versatile.

INDUSTRIES

Automotive Suppliers
Electronics



Montech Conveyors Corp
Daetwyler Plaza
13420 Reese Blvd West
Huntersville, NC 28078, USA
Phone +1 704 659 2187
info.us@montech.com