
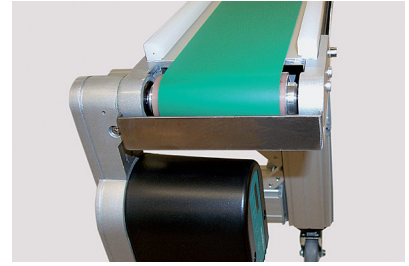
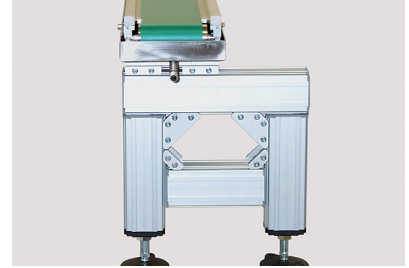


MOBILE CONVEYOR WITH DRIP PAN

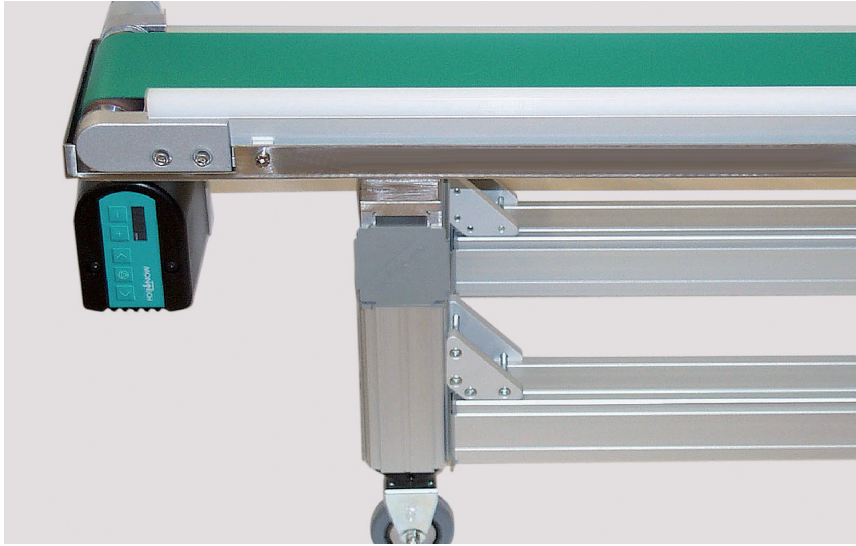

TECHNICAL DATA

Type of conveyor	KTB-140 Minidrive Conveyor
Drive	End drive, brushless DC-motor
Width over chassis	5.51 in (140 mm)
Usable conveyor width	4.33 in (110 mm)
Conveyor length	5.57 ft (1700 mm)
Max. transport weight	11 lb (5 kg) buffering mode
Speed	1.31-24.93 ft/min (0.4 – 7.6 m/min) with integrated control
Belt type endless	HNB-5E
Substructure	Quick-Set profile framing system, mobile, 4 castors

SPECIAL FEATURES

- drip pan for collecting oily residue
- variabel speed with integrated control
- 24 V brushless DC-motor

PROJECT DESCRIPTION

The KTB minidrive conveyor is mounted to a mobile chassis equipped with four castors. Powered by an end drive, the KTB-140 transports small parts from a machining tool to a point further along in the production process. Oily residue from the machined parts is collected in a drip pan mounted below the belt.

INDUSTRY

Automotive



Montech Conveyors Corp.
info.us@montech.com