
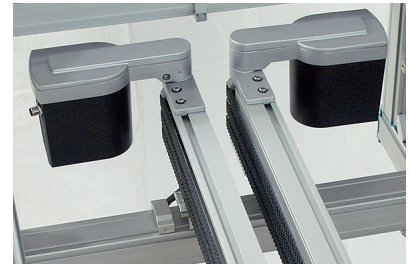


PARALLEL CONVEYORS: VERTICALLY MOUNTED, ADJUSTABLE

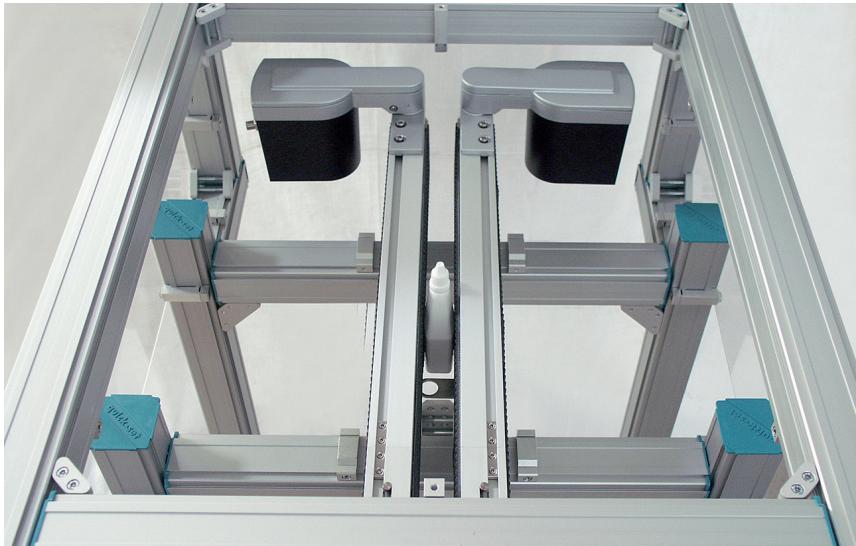

TECHNICAL DATA

| | |
|-------------------|--|
| Type of conveyor | KTBD-105 minidrive conveyor with three belts |
| Drive | End drive |
| Conveyor width | 4.13 in (105 mm) |
| Useful width | Adjustable with clamping levers |
| Conveyor length | 19.68 in (500 mm) |
| Driving axle | With spline shaft |
| Speed | Variable |
| Belt type endless | SAG-8E, grip surface, 0.62 in (16 mm) wide |
| Substructure | Quick-Set profile framing system |

SPECIAL FEATURES

- vertically mounted in a Quick-Set frame
- separation between conveyors easily adjustable with clamping levers
- adjustable speed via electronic display
- belts feature a grip surface

PROJECT DESCRIPTION

Two parallel KTBD-105 minidrive conveyors are equipped with three belts with a grip surface and vertically mounted in a Quick-Set frame. The separation between the conveyors can be easily adjusted with clamping levers, allowing the system to transport products of various sizes.

INDUSTRIES

Medical
Pharmaceutical



Montech Conveyors Corp
Daetwyler Plaza
13420 Reese Blvd West
Huntersville, NC 28078, USA
Phone +1 704 659 2187
info.us@montech.com