


SAFETY ENCLOSURE WITH ACCESS

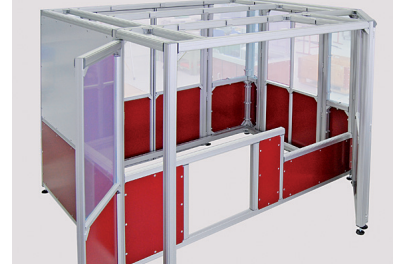

TECHNICAL DATA

Framing structure	Quick-Set size 40
Height	6.45 ft (1966 mm) (plus height-adjustable feet)
Protective glass	Plexiglas Resist 0.19 in (5 mm), clear
Paneling	DIBOND® sheets, 0.15 in (4 mm)
Framework	LP-66-40 light profile
Roof area	TP-66-40 supporting profile
Corner connections	EV-3-40 corner piece
Clamps	SLL-55-40 clamping elements

SPECIAL FEATURES


- assembly without drilling and pinning
- swing doors and liftable safety panels ensure access
- lightweight framework for easier lifting

PROJECT DESCRIPTION

Safety enclosures protect against accidents during dangerous production procedures. However, access to these areas is still necessary. This custom-designed safety enclosure offers several points of access via swing-through doors, liftable Plexiglas safety panels and sliding aluminium composite sheets or DIBOND®. The Quick-Set framing system is lightweight, and the entire structure can be assembled without drilling or pinning, making this modular system flexible and reusable.

INDUSTRIES

- Automotive
- Electronics

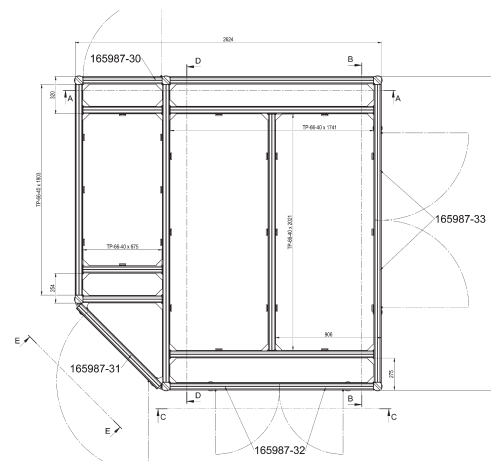

Montech Conveyors Corp
 Daetwyler Plaza
 13420 Reese Blvd West
 Huntersville, NC 28078, USA
 Phone +1 704 659 2187
 info.us@montech.com