


TRANSFER SYSTEM WITH SIMPLE PASS

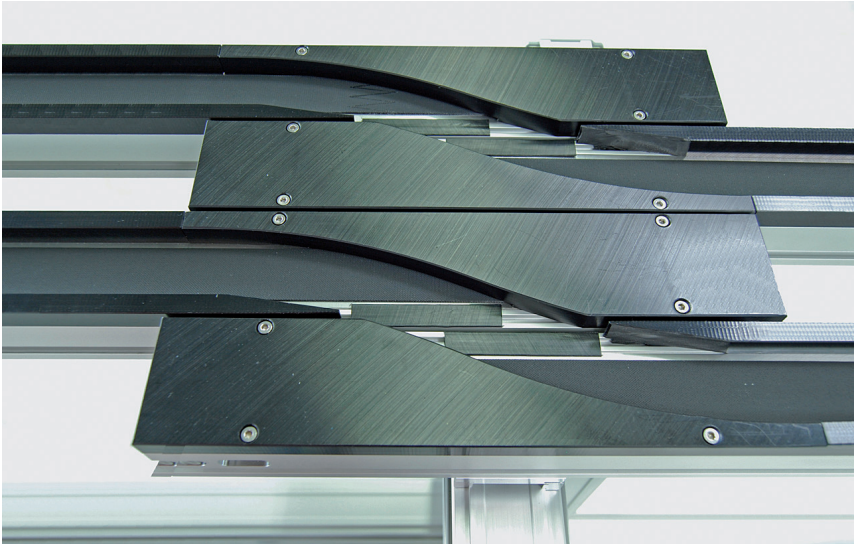

TECHNICAL DATA

Type of conveyor	LTE-60 transfer system
Drive	Three-phase motor 3x480 V, 60 Hz
Conveyor width	2.36 in (60 mm)
Workpiece holder	1.45 x 1.45 in (37 x 37 mm)
Conveyor length	Total 37.90 ft (11 552 mm)
Transport weight	55.11 lb (25 kg) per conveyor
Speed	42.65 and 65.55 ft/min (13.0 and 21.2 m/min)
Opening passage	3.28 in (1000 mm)
Locking	Mechanical
Belt type endless	ENI-5EE
Substructure	Quick-Set profile framing system, movable passage

SPECIAL FEATURES

- retractable pass-through on castors
- mechanical locking mechanism
- simple, manual system

PROJECT DESCRIPTION

Instead of a typical swiveling conveyor, this single conveyor with a simple pass-through transfer section easily retracts to allow access to both sides of the production line and then extends to reconnect the system.

INDUSTRIES

Automotive Supplier
Electronics
Cosmetics
Plastics
Pharmaceutical



Montech Conveyors Corp
Daetwyler Plaza
13420 Reese Blvd West
Huntersville, NC 28078, USA
Phone +1 704 659 2187
info.us@montech.com